


MOBILE HOME SERVICE TERMINATION DIRECT WIRED TYPE TO SERVICE PEDESTAL

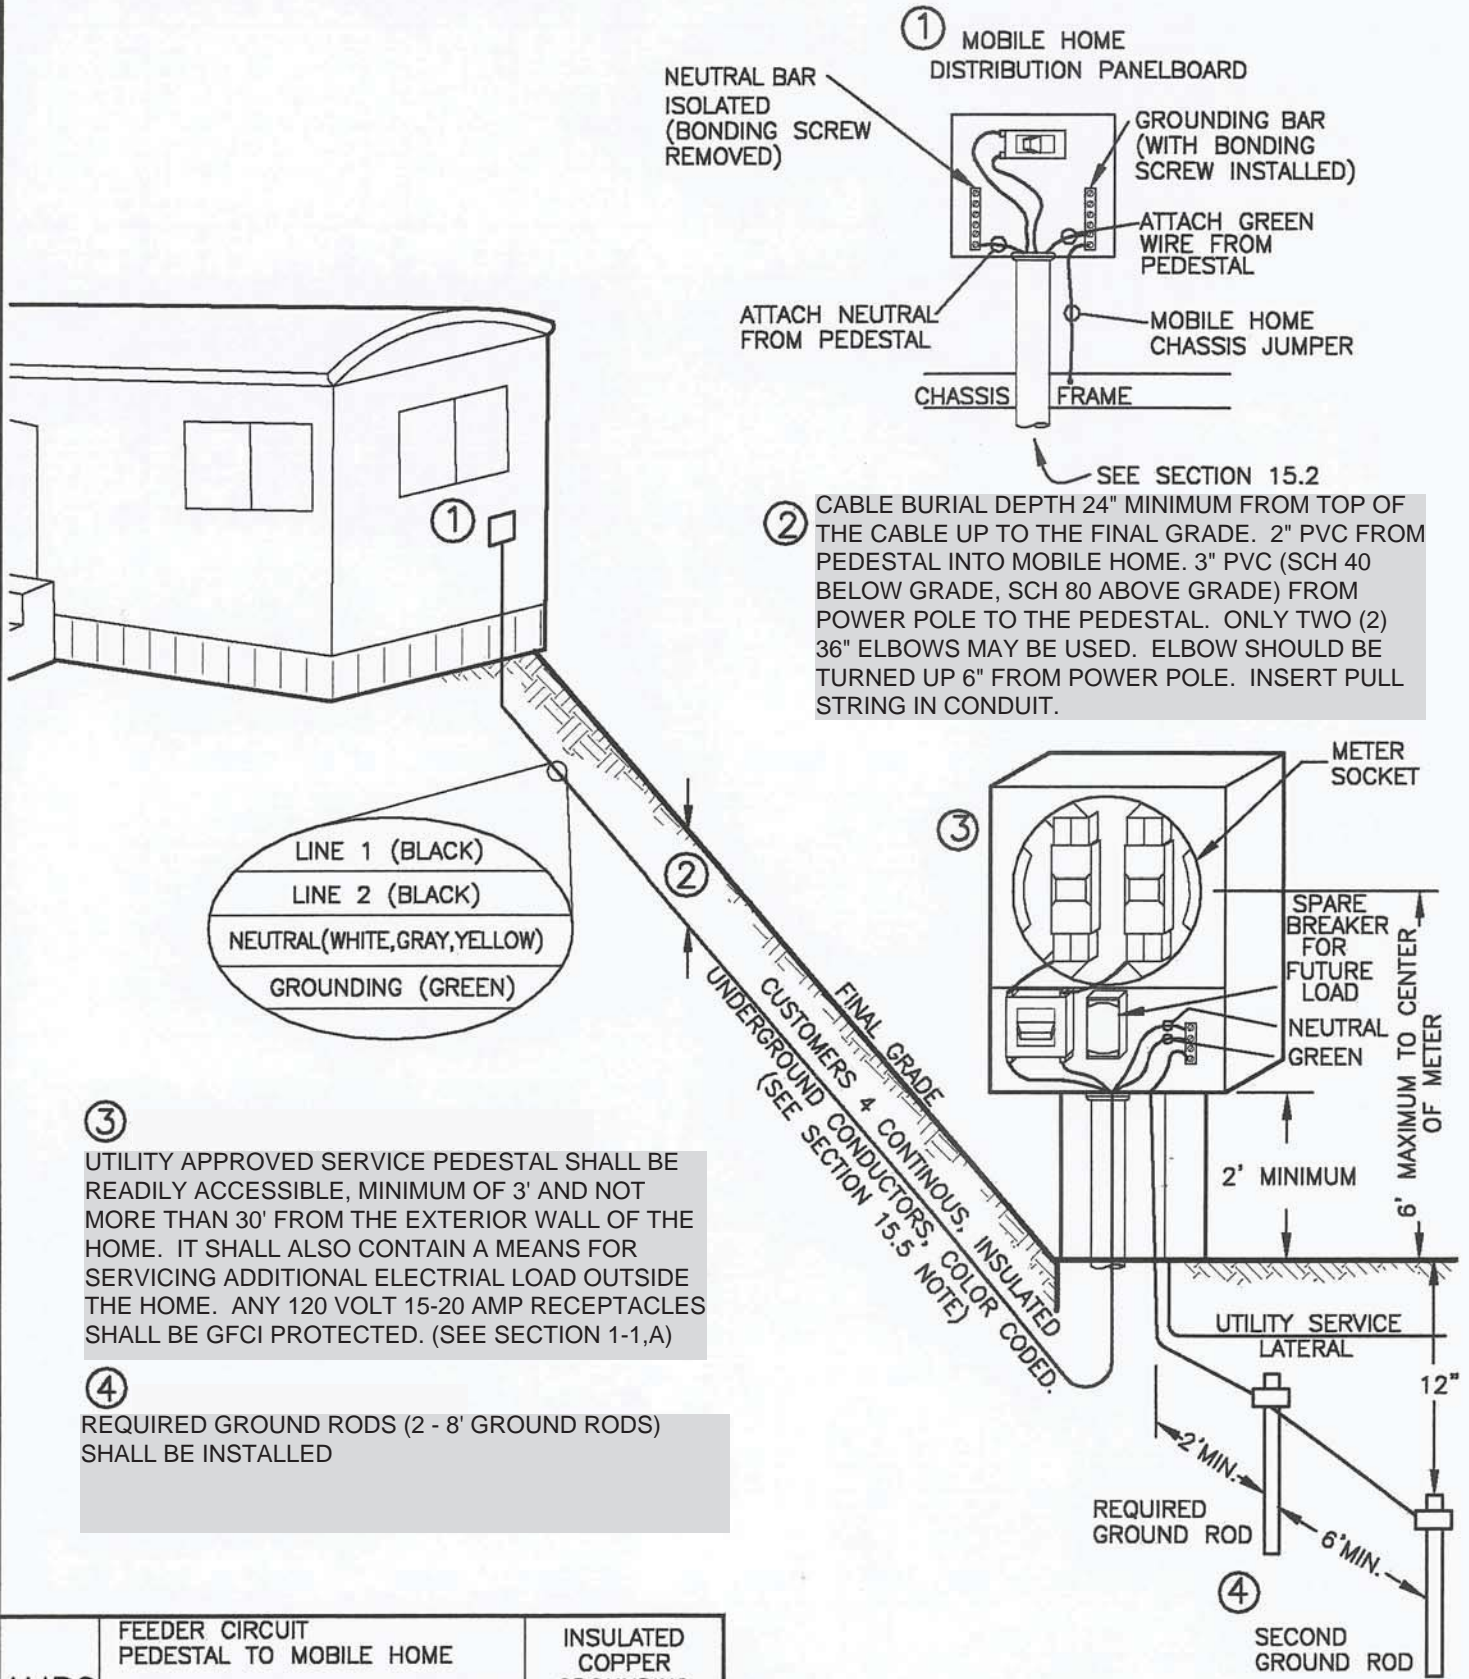

AMPS	FEEDER CIRCUIT PEDESTAL TO MOBILE HOME			INSULATED COPPER GROUNDING WIRE (GREEN)	
	CONDUCTOR	RHW,UF,URD,OR EQUIV.	CONDUIT		
100	#4	1 1/4"	# 2	1 1/4"	#8
200	#2/0	2"	#4/0	2"	#6

Diagram 15-C